




**MOOSE SPORT™**

**Moose Sports Surfaces, Ltd.**  
2257 North Wayne Avenue, Suite 2C  
Chicago, Illinois 60614

773.477.4664  
[www.mooseports.com](http://www.mooseports.com)

# SportLastic® Track

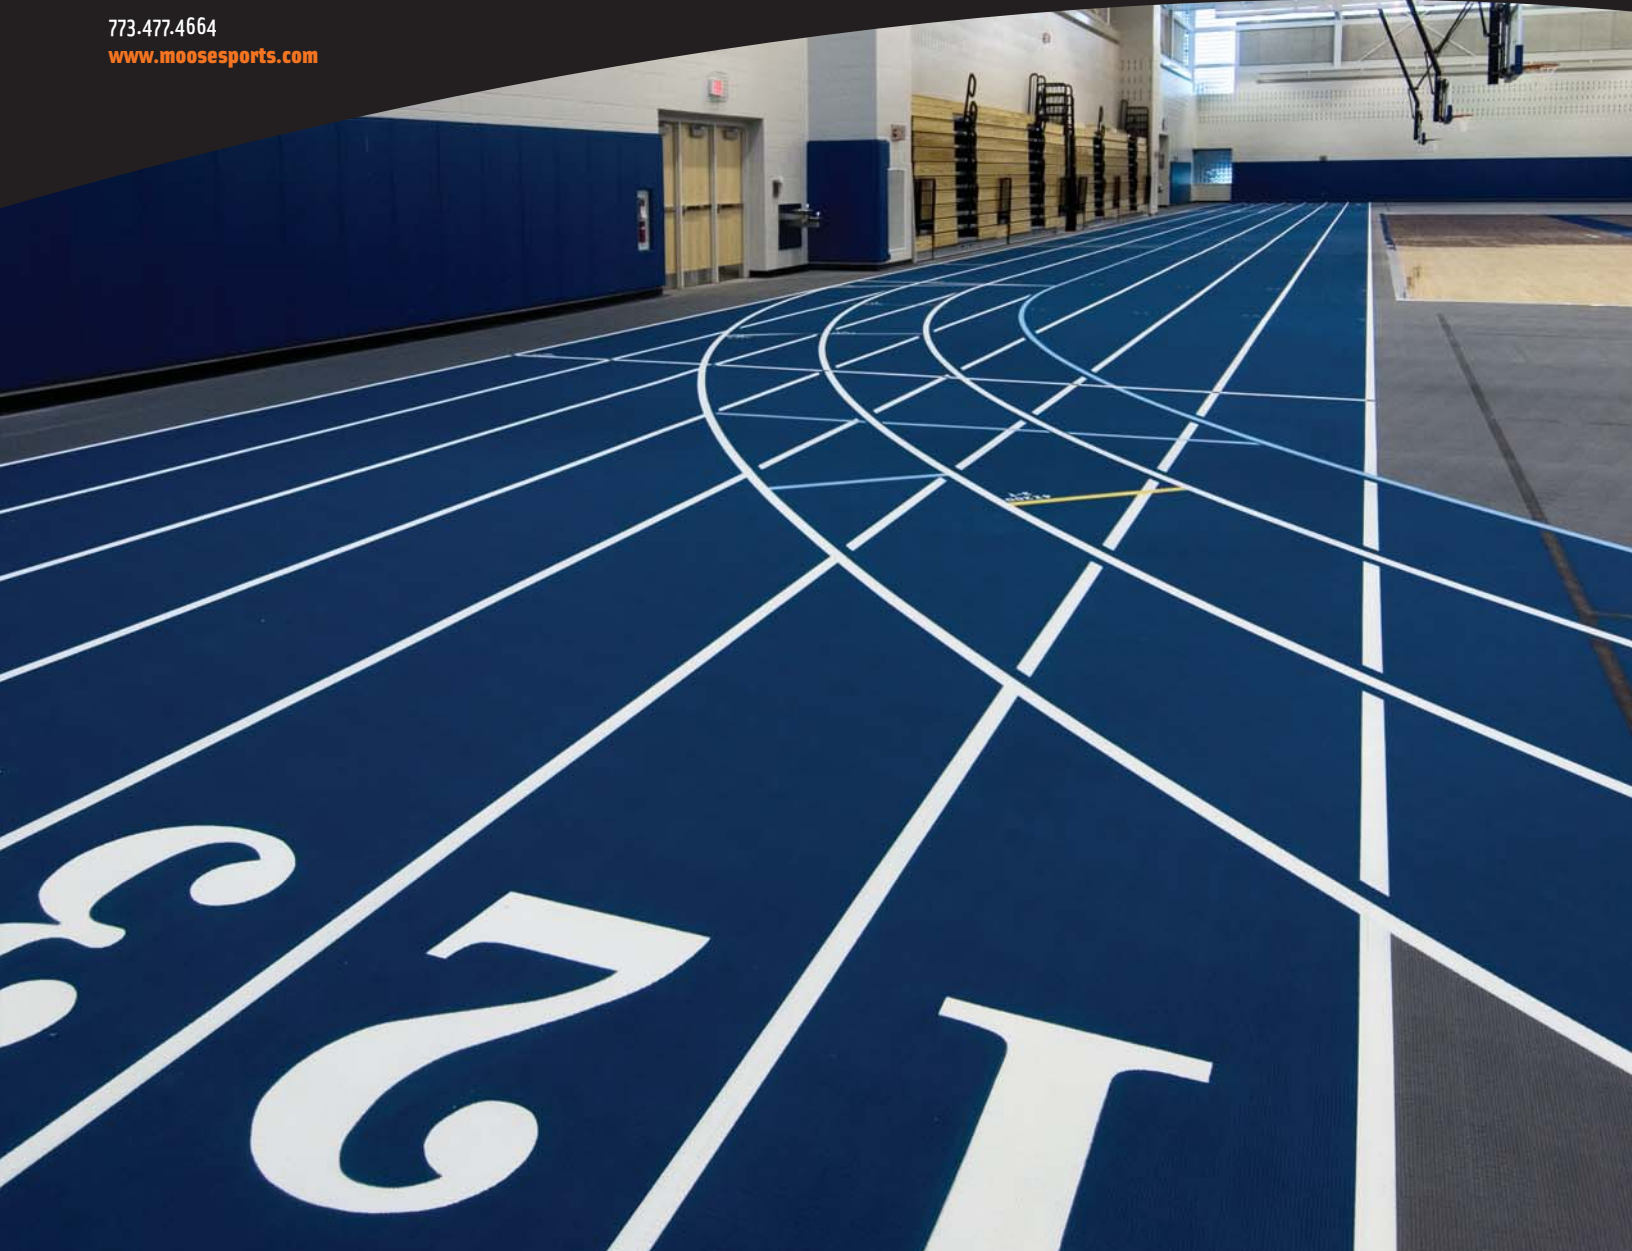


## **About SportLastic® Track**

SportLastic® Track is a prefabricated vulcanized rubber surface made from synthetic and natural rubber compounds, mineral fillers, color pigments and stabilizing agents.

SportLastic® Track is manufactured in a highly controlled process that meets the IAAF (International Association of Athletics Federations) Performance Specification Requirements.


Running tracks made with SportLastic® Track are durable enough to withstand the combined effects of compaction, abrasion, spike damage ultra violet light, water, moisture and temperature extremes.

*Perfect For Indoor & Outdoor Tracks*

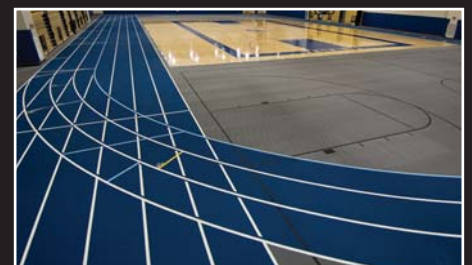

**Moose Sports Surfaces, Ltd.**  
2257 North Wayne Avenue, Suite 2C  
Chicago, Illinois 60614

773.477.4664  
[www.mooseports.com](http://www.mooseports.com)

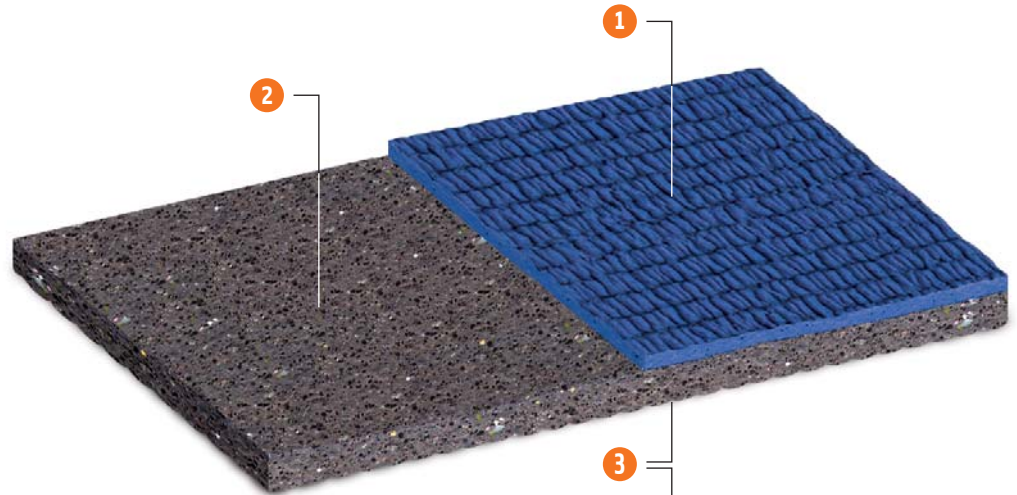

- 1 Spike Resistant Texture Layer**
- 2 Compaction Resistant Core Layer**
- 3 Shock Absorbing Base Layer**

**Thickness:**

SportLastic® Track spike resistant surface is available in 5, 6, 8, 10, 12, 13 and 14mm thicknesses.

**Technical Data**

<b>Hardness Shore A</b>	ASTM D 2240	55 Top/45 Bottom**
<b>Force Reduction</b>	IAAF Test	37.9%*
<b>Compression Set</b>	ASTM D 395	90
<b>Tensile Strength Properties</b>	IAAF Test	0.93 MPa*
<b>Elongation at Break</b>	IAAF Test	201%*
<b>Resilience by Vertical Rebound</b>	ASTM D 2632	68
<b>Modified Vertical Deformation</b>	IAAF Test	1.64mm*
<b>Coefficient of Friction (Wet)</b>	IAAF Test	0.64*
<b>V.O.C. Compliance</b>	ASTM D 5116	Yes
<b>Flammability/Critical Radiant Flux</b>	ASTM E 648	0.59 w/cm <sup>2</sup> Class 1
<b>Resistance to Mold Growth</b>	ASTM D 3273	Excellent
<b>Spike Resistance</b>	DIN 18035-6	Class 1
<b>Optical Density of Smoke</b>	ASTM E 662	<450, Class 1
<b>UV Resistance</b>	DIN 18035-6	0.86 Pass
<b>Color Stability</b>		Good
<b>Chemical Resistance</b>		Good



(Bottom View)

**Standard Colors:**



Colors shown are approximations. Contact Moose Sports Surfaces, Ltd. for actual color samples.

\*13mm thickness \*\*customize upon request